


## SM 10系列产品安装尺寸表

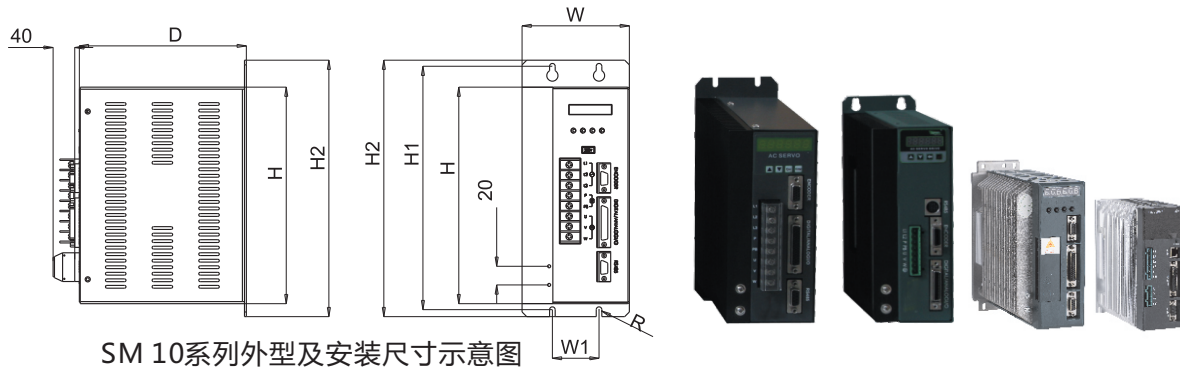

SM 10系列外型及安装尺寸示意图

驱动器型号	安装孔位		外形尺寸				安装孔径	重量 Kg
	W1	H1	H	H2	W	D	R	
SM10-40BA	40	202	176	222	78	180	Φ5	2
SM10-75BB	40	202	176	222	78	180	Φ5	2
SM10-10CB	40	202	176	222	78	180	Φ5	2
SM10-15CB	40	202	176	222	90	180	Φ5	2.5
SM10-22CB	40	202	176	222	90	180	Φ5	2.5
SM10-30CC	50	250	232	275	115	180	Φ6	4
SM10-40CC	50	250	232	275	115	180	Φ6	4
SM10-55CC	50	250	232	275	115	180	Φ6	4
SM10-75CC	70	306	285	320	128	237	Φ6	7
SM10-11DC	70	306	285	320	128	237	Φ6	7
SM12-75BB	72	168	180	180	83	143	Φ5	1.6
SM12-10CB	45	190	182	208	84	192	Φ6	2
SM12-15CB	45	190	182	208	84	192	Φ6	2
SM12-22CB	45	190	182	208	84	192	Φ6	2

## SM 10产品规格表(S1工作制)

驱动器型号	输入电压	额定功率	额定电流	最大电流	适配电机容量	外置制动电阻 Ω	
	Vac	kW	A	A	kW		
SM10-40BA	单、三相 AC220V - 15%~+10% (50/60Hz)	0.40	2	4	0.40	-	
SM10-75BB		0.75	3	5	0.75		
SM10-10CB		1.00	5	8	1.00		
SM10-15CB		1.50	6	11	1.50		
SM10-22CB		2.20	7	13	2.20		
SM10-30CB		3.00	10	18	3.00		≥60
SM10-40CB		4.00	12	22	4.00		
SM10-55CB		5.50	17	31	5.50		
SM10-30CC		3.00	7	13	3.00		
SM10-40CC		4.00	10	18	4.00		
SM10-55CC	5.50	13	24	5.00			
SM10-75CC	7.50	17	31	7.50			
SM10-11DC	11.00	25	45	11.00	≥32		
SM12-75BB	单、三相	0.75	3	5	0.75	-	
SM12-10CB	AC220V	1.00	5	8	1.00		
SM12-15CB	- 15%~+10%	1.50	6	11	1.50		
SM12-22CB	(50/60Hz)	2.20	7	13	2.20		