

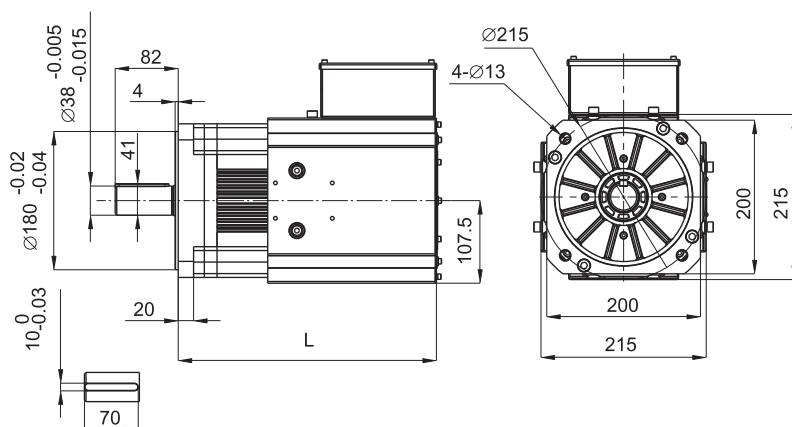
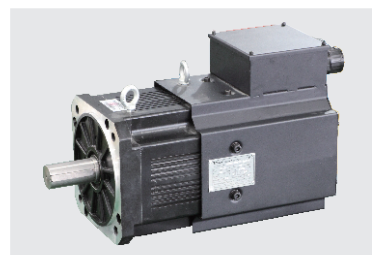


200 系列永磁交流伺服电机技术参数(强迫风冷)

200 Series Servo Motor – Technical Parameters (forced-air cooling)

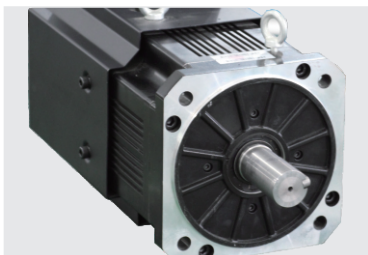

200机座安装尺寸示意图



机座号 200

型号	额定扭矩 N.m	额定电压 Vac	额定转速 rpm	额定功率 kW	额定电流 A	Kt值 N.m/A	Ke常数 V/krpm	最高转速 rpm	最大扭矩 N.m	转子惯量 Kg.cm ²	极数 Poles	重量 Kg	L长度 mm
200H75C15C	50	380	1500	8	18	3.1	192	2000	150	54	8	18	342
200H90C17C	50	380	1700	9	21	2.7	165	2210	150	54	8	18	342
200H11D20C	50	380	2000	11	24	2.3	144	2500	150	54	8	18	342
200H11D15C	70	380	1500	11	24	3.2	195	2000	210	81	8	30	379
200H13D17C	70	380	1700	13	27	2.8	175	2210	210	81	8	30	379
200H15D20C	70	380	2000	15	33	2.3	144	2500	210	81	8	30	379
200H15D15C	96	380	1500	15	34	3.1	192	2000	288	108	8	37	416
200H17D17C	96	380	1700	17	37	2.9	178	2210	288	108	8	37	416
200H20D20C	96	380	2000	20	43	2.4	151	2500	288	108	8	37	416
200H18D15C	118	380	1500	18	41	3.2	197	2000	354	134	8	48	453
200H21D17C	118	380	1700	21	47	2.8	171	2210	354	134	8	48	453
200H25D20C	118	380	2000	25	55	2.4	146	2500	354	134	8	48	453
200H22D15C	140	380	1500	22	49	3.2	195	2000	420	160	8	57	490
200H25D17C	140	380	1700	25	54	2.8	175	2210	420	160	8	57	490
200H29D20C	140	380	2000	29	61	2.5	154	2500	420	160	8	57	490
200H25D15C	157	380	1500	25	54	3.2	195	2000	471	160	8	57	490
200H28D17C	157	380	1700	28	59	2.8	175	2210	471	160	8	57	490
200H33D20C	157	380	2000	33	68	2.5	154	2500	471	160	8	57	490

电机绝缘等级: H; 热保护: Pt100, KTY可选; 防护等级: IP65(风罩除外); 接线方式: 航空插头或接线盒; 风扇电压: 220V; 工作制: S1