

60mm, 80mm, 90mm Permanent Magnet AC Servo Motor


- Technical Parameters





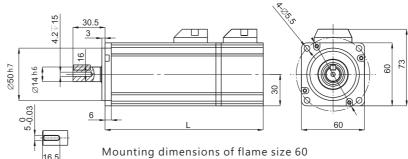

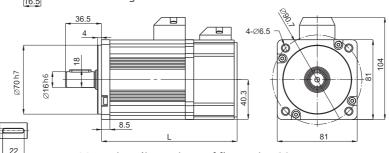

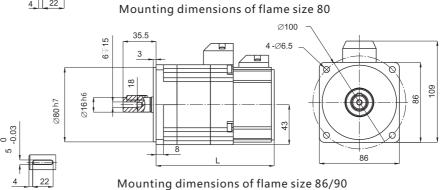

Flame size 60mm														
Model	Rated	Rated	Rated	Rated	Rated	Kt	Ke	Max.	Max.	Rotor	Poles	Weight	Length	Length (with braker)
	Torque	Voltage	Speed	Power	Current		Ke	Speed	Torque	Inertia				(with braker)
	N.m	Vac	rpm	kW	Α	N.m/A	V/krpm	rpm	N.m	Kg.cm ²	poles	Kg	mm	mm
60A40B30C	1.3	220	3000	0.4	2.7	0.51	31	4000	3.9	0.21	8	1.3	130	170
60A40B60C	0.7	220	6000	0.4	1.6	0.46	28	6500	2.1	0.13	8	1.1	110	150

Flame size 80mm														
Model	Rated	Rated	Rated	Rated	Rated	Kt	Ke	Max.	Max.	Rotor	Poles	Weight	Length	Length
	Torque	Voltage	Speed	Power	Current	Νί	Ne Ne	Speed	Torque	Inertia				(with braker
	N.m	Vac	rpm	kW	Α	N.m/A	V/krpm	rpm	N.m	Kg.cm ²	poles	Kg	mm	mm
80A40B15C	2.4	220	1500	0.4	2.4	1.07	65	2000	7.2	1.2	8	4	158	213
80A40B30C	1.3	220	3000	0.4	2.9	0.48	29	4000	3.9	0.9	8	2	138	193
80A75B30C	2.4	220	3000	0.75	3.1	0.83	50	4000	7.2	1.2	8	3	158	213
80A15C30C	4.8	220	3000	1.5	5.9	0.88	53	4000	14.4	2.4	8	6	198	253

Flame size 86/90mm														
	Rated	Rated	Rated	Rated	Rated	Kt	Ke	Max.	Max.	Rotor	Poles	Weight	Length	Length
Model	Torque	Voltage	Speed	Power	Current		Ke	Speed	Torque	Inertia	rules			(with braker)
	N.m	Vac	rpm	kW	Α	N.m/A	V/krpm	rpm	N.m	Kg.cm ²	poles	Kg	mm	mm
86A75B30C	2.4	220	3000	0.75	3.0	0.86	52	4000	7.2	1.6	8	3	128	183
86A75B15C	4.8	220	1500	0.75	3.4	1.52	92	2000	14.4	3.2	8	6	163	218